



SPEAKER SYSTEM

EXTERNAL VIEW

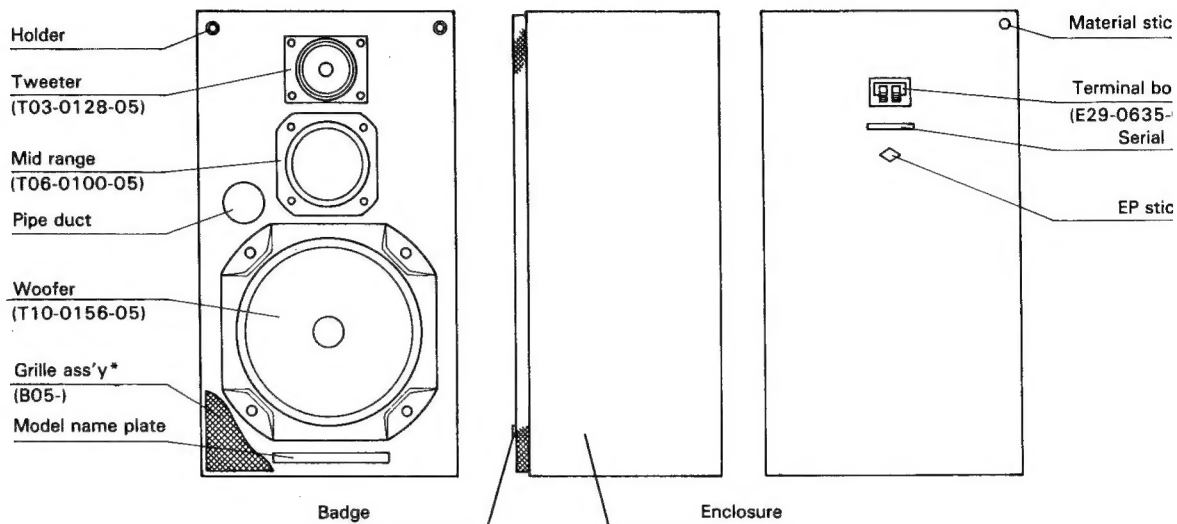


* Refer to Parts List.

SCHEMATIC DIAGRAM

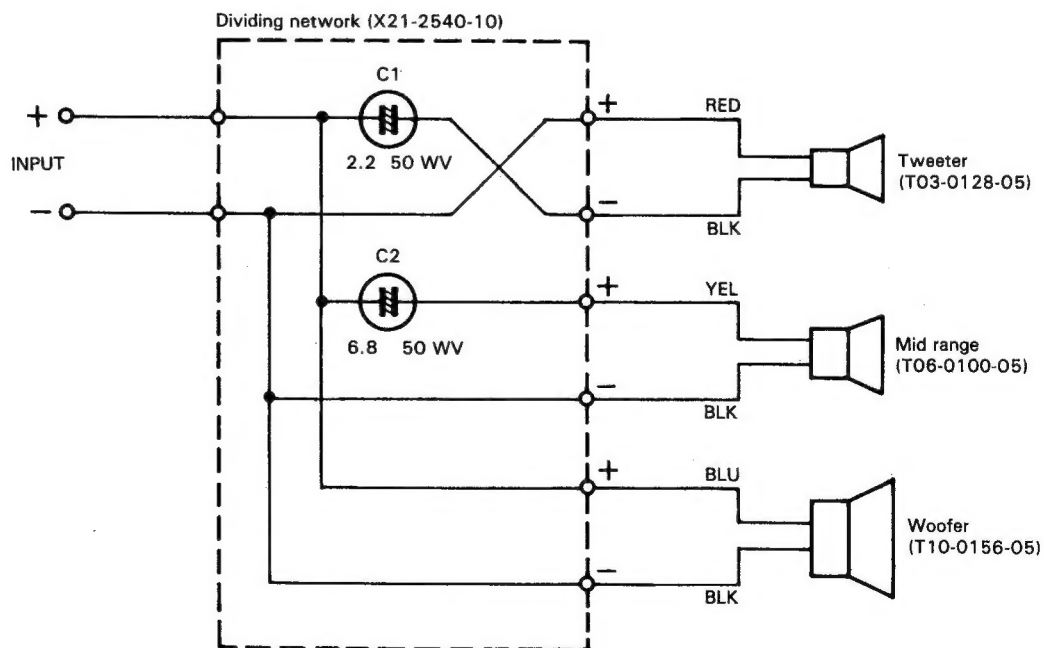

PACKING/PARTS LIST/SPECIFICATIONS

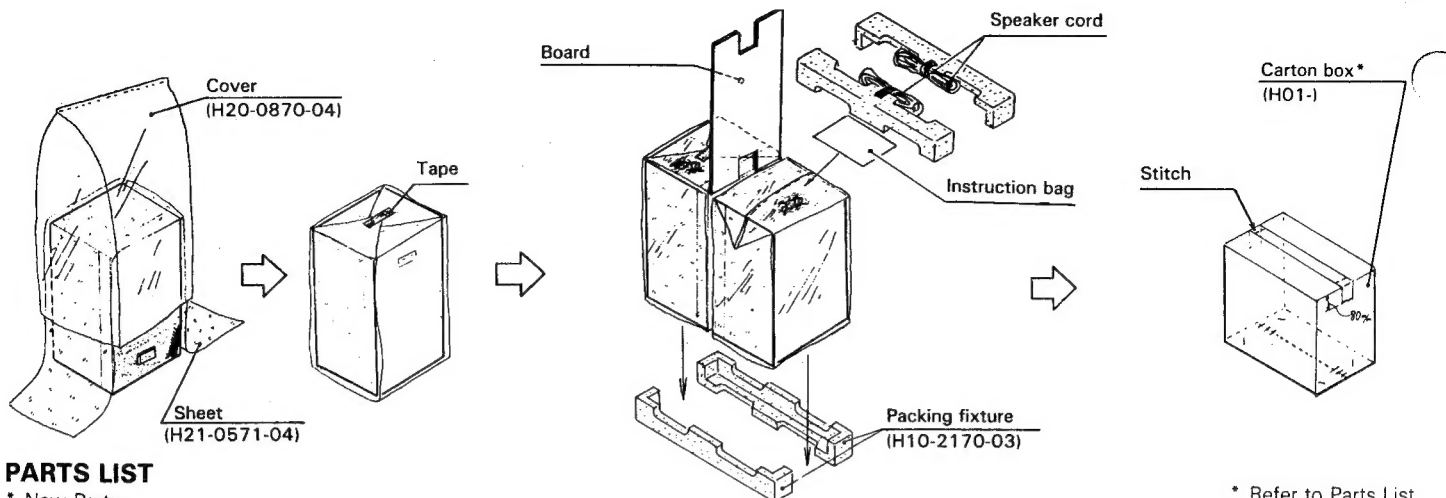

PARTS LIST

* New Parts

Ref. No. 参照番号	Parts No. 部品番号	Description 部品名 / 規格	Re- marks 備考
LSK-400D/30D			
-	B05-0540-13	GRILLE ASSY	*K
-	B05-0540-13	GRILLE ASSY	MU
-	B05-0540-13	GRILLE ASSY	PE
-	B05-0540-13	GRILLE ASSY	H
-	B05-0540-13	GRILLE ASSY	UE
-	B05-0541-13	GRILLE ASSY	*T
-	B46-0055-30	WARRANTY CARD	P
-	B46-0060-00	WARRANTY CARD	T
-	B46-0061-30	WARRANTY CARD	K
-	B46-0062-30	WARRANTY CARD	UH
-	B46-0062-30	WARRANTY CARD	UE
-	B46-0063-13	WARRANTY CARD	U
-	B46-0078-03	WARRANTY CARD	E
-	B50-3837-00	INSTRUCTION MANUAL	*K
-	B50-3837-00	INSTRUCTION MANUAL	UP
-	B50-3837-00	INSTRUCTION MANUAL	H
-	B50-3837-00	INSTRUCTION MANUAL	UE
-	B50-3838-00	INSTRUCTION MANUAL	*M
-	B50-3838-00	INSTRUCTION MANUAL	E
-	B50-3839-00	INSTRUCTION MANUAL	*T
-	E30-1003-05	SPEAKER CORD	
-	H01-4008-04	CARTON BOX	*K
-	H01-4008-04	CARTON BOX	UP
-	H01-4008-04	CARTON BOX	H
-	H01-4008-04	CARTON BOX	UE
-	H01-4009-04	CARTON BOX	*M
-	H01-4009-04	CARTON BOX	E
-	H01-4010-04	CARTON BOX	*T
-	H10-2170-03	POLYSTYRENE FIXTURE	*
-	H20-0870-04	COVER	*
-	H21-0571-04	SHEET	*
-	H25-0078-04	BAG (235X315)	KT
-	H25-0078-04	BAG (235X315)	UP
-	H25-0078-04	BAG (235X315)	H
-	H25-0078-04	BAG (235X315)	UE
-	T03-0128-05	SPEAKER (TWEETER)	*
-	T06-0100-05	SPEAKER (MID RANGE)	*
-	T10-0156-05	SPEAKER (WOOFER)	*
-	X21-2540-10	DIVIDING NETWORK ASSY	*
NETWORK (X21-2540-10)			
C1	C23-1722-56	ELECTRO 2.2UF 50WV	
C2	C23-1768-56	ELECTRO 6.8UF 50WV	

SPECIFICATIONS

System	3-Way, 3-Speaker System
Mounted Speakers	
Woofer	250 mm (10") Cone Type
Midrange	110 mm (4-21/64") Cone Type
Tweeter	60 mm (2-3/8") Cone Type
Enclosure	Bass-Reflex Type
Maximum Input	
Power	100 Watts
Rated	
Input Power	65 Watts
Sensitivity	89 dB/w at 1m
Frequency	
Response	45 Hz to 20,000 Hz
Crossover	
Frequencies	1,000 Hz, 5,000 Hz
Impedance	8 ohms
Speaker Terminals	One Touch Connection Type
Dimensions	W: 306 mm (12-3/64")
	H: 554 mm (21-13/16")
	D: 258 mm (10-5/32")
Weight (Net)	16.0 kg (35.3 lbs)/pair
Enclosure Finish	Construction of enclosure is high density particle board laminated with polyvinyl finish.

(Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.)

A product of
TRIO-KENWOOD CORPORATION
 Shionogi Shibuya Building, 17-5, 2-chome Shibuya, Shibuya-ku, Tokyo 150 Japan

KENWOOD U.S.A. CORPORATION

1315 E Watsoncenter Rd. Carson, California 90745, U.S.A.
 75 Seaview Drive, Secaucus, New Jersey 07094, U.S.A.

TRIO-KENWOOD CANADA INC.

1070 Jayson Court, Mississauga, Ontario, Canada L4W 2V5

TRIO-KENWOOD ELECTRONICS, N.V.

Leuvensesteenweg 504, B-1930 Zaventem, Belgium

TRIO-KENWOOD ELECTRONICS, GmbH

Rudolf-Braas-Str. 20, 6056 Heusenstamm, West Germany

TRIO-KENWOOD FRANCE S.A.

5, Boulevard Ney, 75018 Paris, France

TRIO-KENWOOD AG

Unterboesch 6331 Huenenberg/ZUG Switzerland

TRIO-KENWOOD (AUSTRALIA) PTY. LTD.

4E Woodcok Place, Lane Cove. N.S.W. 2066, Australia

KENWOOD & LEE ELECTRONICS, LTD.

Wang Kee Building, 5th Floor, 34- Connaught Road Central, Hong Kong

E: Scandinavia & Europe (LSK-30D) H: Audio Club K: U.S.A.
 P: Canada S: South Africa T: England U: PX (Far East, Hawaii)

UE: AAFES (Europe) X: Australia M: Other Areas (LSK-30D)

© 1982-10 PRI

PAN B51-1278-10 (T) 2820